

Art. Nr. Art. br. Art. no.	L / H / T (mm)	Schrank Typ Tip ormarića Cabinet type	Schrank Typ Tip ormarića Cabinet type
		UNI 110 T	TTO A
43-566 302	225/200/35	400	0.4
43-566 303	275/200/35	500	0.4
43-566 304	325/200/35	600	0.5
43-566 305	375/200/35	600	0.5
43-566 306	425/200/35	750	1.0
43-566 307	475/200/35	750	1.0
43-566 308	525/200/35	750	1.5
43-566 309	575/200/35	900	1.5
43-566 310	625/200/35	900	2.0
43-566 311	675/200/35	900	2.0
43-566 312	725/200/35	1050	2.0

**Verteiler TTO Top 69 E
für Fußbodenheizung**

Verteiler bestehend aus Vorlaufbalken und Rücklaufbalken aus Edelstahlprofil 1.4301 und Wandhalter mit Schalldämmeinlage, Rechts gekröpft um 25 mm.*

Vorlaufbalken:

- 2-12 St. integrierte Durchflussmengenanzeiger, 0-5 l/min
- 2-12 St. Nippel vernickelt mit Eurokonus 3/4"
- 1 St. Entleerungshahn 1/2" drehbar, vernickelt
- 1 St. Entlüftungsventil 1/2" drehbar, vernickelt
- 2 St. Innengewinde 1" Primärseite

Rücklaufbalken:

- 2-12 St. integrierte TTO Thermostateinsätze (nachrüstbar mit Stellantrieben, M30x1,5)
- Ventilhub 2,9 mm
- 2-12 St. Nippel vernickelt mit Eurokonus 3/4"
- 1 St. Entleerungshahn 1/2" drehbar, vernickelt
- 1 St. Entlüftungsventil 1/2" drehbar, vernickelt
- 2 St. Innengewinde 1" Primärseite

Druckgeprüft nach DIN 3230, in Karton verpackt.

* bei Typ 43-566 302, 1 Wandhalter

**Razdjelnik TTO Top 69 E
za podno grijanje**

Razdjelnik se sastoji od polazne i povratne grane iz specijalnog profila od CrNi čelika 1.4301 s zidnim držačima s uloškom za zvučnu izolaciju desno zamaknutim za 25 mm.*

Polaz:

- 2-12 kom integriranih niklovanih regulatora protoka, vidljiva skala, 0-5 l/min
- 2-12 kom niklovanih spojnica 3/4" s eurokonusom
- 1 kom niklovana ispusna slavina 1/2", zaokretna
- 1 kom niklovani odzračni ventil 1/2", zaokretni
- 2 kom unutarnjeg navoja 1" na primarnoj strani

Povrat:

- 2-12 kom integriranih TTO termostatskih ventila (opcija ugradnje termoelektričnog pogona, M30x1,5)
- hod ventila 2,9 mm
- 2-12 kom niklovanih spojnica 3/4" s eurokonusom
- 1 kom niklovana ispusna slavina 1/2", zaokretna
- 1 kom niklovani odzračni ventil 1/2", zaokretni
- 2 kom unutarnjeg navoja 1" na primarnoj strani

Tlačno ispitano prema DIN 3230, zapakirano u kartonu.

*kod tipa 43-566 302, 1 držač

**Distributning manifold TTO Top 69 E
for floor heating**

Distributing manifold made from special profile of stainless steel 1.4301 with delivery and return assembly. Holders with rubber inserts, right curved with 25 mm offset.*

Delivery:

- 2-12 pcs. integrated nickel plated water flow meters, visible scale 0-5 l/min
- 2-12 pcs. connecting fittings 3/4" with euro-cone
- 1 pcs. relief tap 1/2", nickel plated
- 1 pcs. air release valve 1/2", nickel plated
- 2 pcs. female thread 1" on primary side


Return:

- 2-12 pcs. integrated TTO thermostat valves (optional with thermoelectric actuators, M30x1,5)
- lift 2,9 mm
- 2-12 pcs. connecting fittings 3/4" with euro-cone
- 1 pcs. relief tap 1/2", nickel plated
- 1 pcs. air release valve 1/2", nickel plated
- 2 pcs. female thread 1" on primary side


Pressure tested according to DIN 3230, packaging in cardboardes.

*with type 43-566 302, 1 holder

**1.1. Durchflussmengenanzeiger Diagramm
Dijagram regulatora protoka
Diagram of water flow meter**

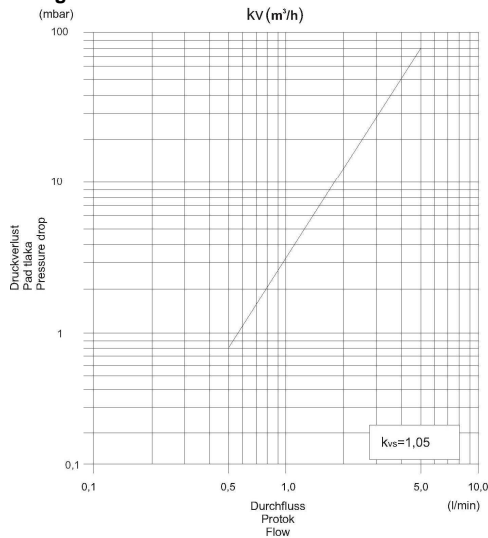

**1.2. Thermostateinsatz Diagramm
Dijagram termostatskog ventila
Diagram of thermostat valve**

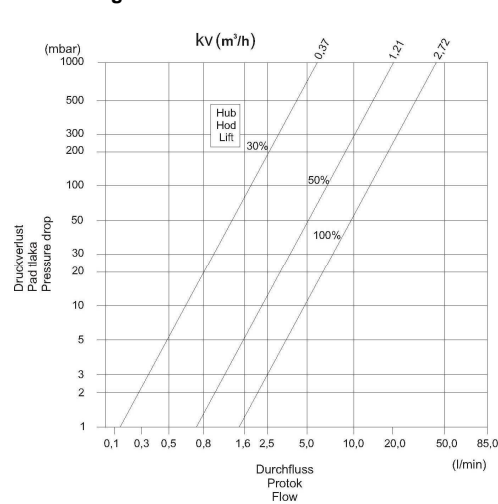

Alle Rechte vorbehalten. Abbildungen können von den Produkten abweichen. Technische Änderungen vorbehalten.

Prizržavamo pravo izmjena na proizvodima i nakon narudžbe pod uvjetom da se tim izmjenama ne mijenja funkcija proizvoda, bez prethodnog upozorenja.

We reserve the right to alter our products without notice. This also applies to products already in order provided that such changes do not change the function of the product.